

BRONN

ALTO™

BR-2350

**TWO-PIECE ELONGATED
HIGH-EFFICIENCY TOILET**



SPECIFICATION


- Vitreous china
- High efficiency (4.8 Lpf / 1.28 gpf)
- Self-clean glazing
- Two-piece toilet, reversible tank
- R&T cUPC certified water flush valve
- Excess eddy siphon action bowl
- Skirted toilet bowl
- 2" fully-glazed trapway
- Soft-close seat
- Chrome-plated side wrench
- 100% factory flush tested
- 2 bolt caps

NOMINAL DIMENSIONS

- 710 × 380 × 775 mm (28" × 15" × 30-1/2")

COMPLIANCE CERTIFICATIONS

- ASME A112.19.2M for vitreous china fixtures, incl. flush performance, ball pass diameter, trap seal depth and all dimensions
- cUPC certification from IAPMO
- ADA requirements of ICC/ANSI A117.1-2009 for accessible and usable buildings and facilities

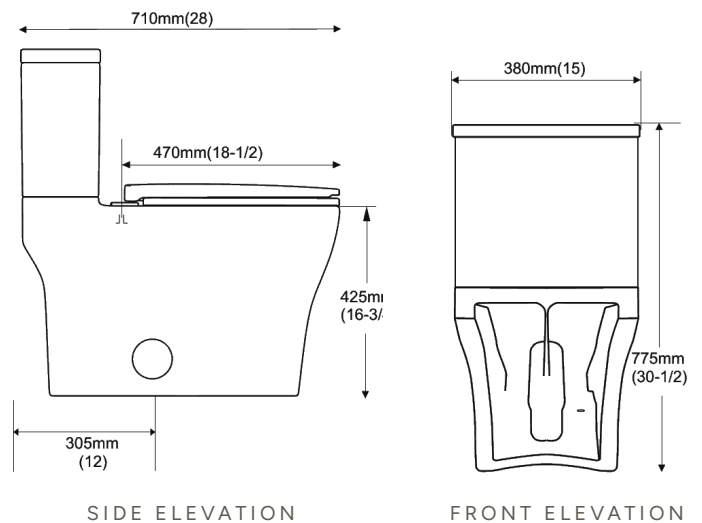

NOTES

This toilet is designed to rough-in at a minimum dimension of 305 mm (12") from finished wall to C/L of outlet. Supply not included with fixture and must be ordered separately. * Dimension shown for location of supply is suggested.

BR-2350